

# GAS FIREPLACE INSERTS FRONT



GAS FIREPLACE INSERT FRONT 150



GAS FIREPLACE INSERT FRONT 120



GAS FIREPLACE INSERT FRONT 150








GAS FIREPLACE INSERT FRONT 38/63

## 5. CLOSED GAS FIREPLACE INSERTS - FRONT

### CLOSED GAS FIREPLACE INSERTS - FRONT - Natural gas/LPG



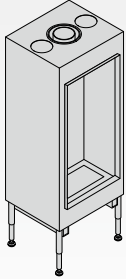
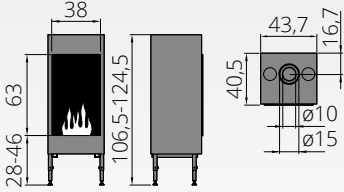

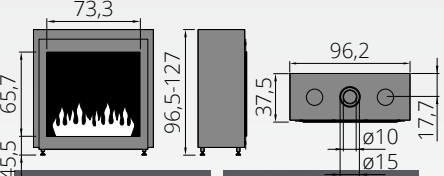


DESCRIPTION	MODEL AIR EXHAUST SYSTEM	DIMENSIONS/WEIGHT	NATURAL GAS/LPG OPTIONAL	PRODUCT- NUMBER	POSSIBLE ACCESSORIES
<p><b>BIT-TC-38/63-F-G</b> Viewing window approx. W 38 x H 63 cm, front - closed, Air-exhaust system (exhaust <math>\varnothing</math>100 mm, combustion air <math>\varnothing</math>150 mm)</p> <p><b>Power:</b> Natural gas: input (consumption): 7,1 kW, output (power): 5 kW LPG: input (consumption): 6,7 kW, output (power): 4,7 kW</p> <p><b>Including:</b> Gas fireplace insert incl. lamellas, decor wood and remote control.</p> <p><b>Optional:</b> Cool Down with gravity support, anti- reflective glazing, glass back panel, LED bed of glowing embers</p>	<p><b>BIT-TC-38/63-F-G</b> with <b>AIR EXHAUST SYSTEM:</b> <math>\varnothing</math>100/150 mm</p> 	<p>Dimensions: approx. W 43,7 x H 107-125 x D 40,5 cm Weight: approx. 85 kg</p> 	BIT-GAS- viewing window approx. 38 x 63 cm	BIT-TC-38/63-F-G	<p>decor stones lava broken (10 kg), decor stones Nero Marquina (10 kg), Superglow, power supply - control unit, smart relaisbox incl. interface, WiFi-control incl. modem and app, wall switch, emergency shutdown for gas appliances, gas socket (natural gas), small bottle regulator for gas bottle (LPG)</p>
			Cool Down with gravity support	BIT-TC-38/63-F-G-CODO	
			anti-reflective glazing	BIT-TC-38/63-F-G-EV	
			glass back panel	BIT-TC-38/63-F-G-GR	
			LED bed of glowing embers	BIT-TC-38/63-F-G-LED	
<p><b>BIT-TC-73/66-F-G</b> Viewing window approx. W 73 x H 66 cm, front - closed, Air-exhaust system (exhaust <math>\varnothing</math>100 mm, combustion air <math>\varnothing</math>150 mm)</p> <p><b>Power:</b> Natural gas: input (consumption): 9,1 kW, output (power): 7,3 kW LPG: input (consumption): 8,4 kW, output (power): 6,7 kW</p> <p><b>Including:</b> Gas fireplace insert incl. decor wood and remote control.</p> <p><b>Optional:</b> lamellas (1), tile (2), firebrick (3), Cool Down with gravity support, anti-reflective glazing, glass back panel</p>	<p><b>BIT-TC-73/66-F-G</b> with <b>AIR EXHAUST SYSTEM:</b> <math>\varnothing</math>100/150 mm</p> 	<p>Dimensions: approx. W 96,2 x H 96,5 - 127 x D 37,5 cm Weight: approx. 110 kg</p>  	BIT-GAS viewing window approx. 73 x 66 cm	BIT-TC-73/66-F-G	
			lamellas (1)	BIT-TC-73/66-F-G-LA	
			tile (2)	BIT-TC-73/66-F-G-SC	
			firebrick (3)	BIT-TC-73/66-F-G-ST	
			Cool Down with gravity support	BIT-TC-73/66-F-G-CODO	
			anti-reflective glazing	BIT-TC-73/66-F-G-EV	
			glass back panel	BIT-TC-73/66-F-G-GR	

## 5. CLOSED GAS FIREPLACE INSERTS - FRONT

### CLOSED GAS FIREPLACE INSERTS - FRONT - Natural gas/LPG

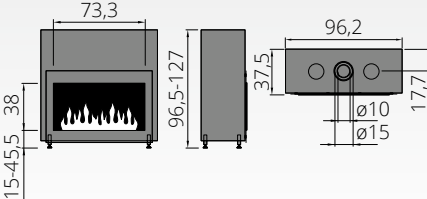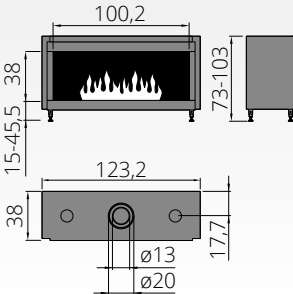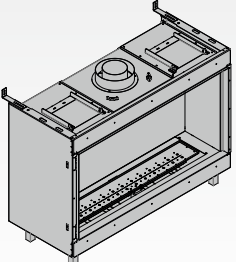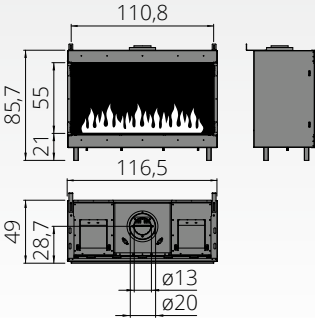







DESCRIPTION	MODEL AIR EXHAUST SYSTEM	DIMENSIONS/WEIGHT	NATURAL GAS/LPG OPTIONAL	PRODUCT- NUMBER	POSSIBLE ACCESSORIES
<p><b>GAP-TC-73/38-F-G</b> Viewing window approx. W 73 x H 38 cm, front - closed, Air-exhaust system (exhaust <math>\varnothing</math>100 mm, combustion air <math>\varnothing</math>150 mm)</p> <p><b>Power:</b> Natural gas: input (consump- tion): 9,1 kW, output (power): 7,3 kW LPG: input (consumption): 8,4 kW, output (power): 6,7 kW</p> <p><b>Including:</b> Gas fireplace insert incl. decor wood and remote control.</p> <p><b>Optional:</b> Cool Down with gravity support, anti-reflective glazing, glass back panel - black</p>	<p><b>GAP-TC-73/38-F-G</b> with <b>AIR EXHAUST SYSTEM:</b> <math>\varnothing</math>100/150 mm</p> 	<p>Dimensions: approx. W 96,2 x H 96,5-127 x D 37,5 cm Weight: approx. 110 kg</p> 	GAP-GAS viewing window approx. 73 x 38 cm	GAP-TC-73/38-F-G	decor stones lava broken (10 kg), decor stones Nero Marquina (10 kg), Superglow, power supply - control unit, smart relaisbox incl. interface, WIFI-control incl. modem and app, wall switch, emergency shutdown for gas appliances, gas socket (natural gas), small bottle regulator for gas bottle (LPG)
			Cool Down with gravity support	GAP-TC-73/38-F-CODO	
			anti-reflective glazing	GAP-TC-73/38-F-G-EV	
			glass back panel	GAP-TC-73/38-F-G-GR	
<p><b>GAP-TC-100/38-F-G</b> Viewing window approx. W 100 x H 38 cm, front - closed, Air-exhaust system (exhaust <math>\varnothing</math>130 mm, combustion air <math>\varnothing</math>200 mm)</p> <p><b>Power:</b> Natural gas: input (consump- tion): 11,5 kW, output (power): 7,7 kW LPG: input (consumption): 9,9 kW, output (power): 7,4 kW</p> <p><b>Including:</b> Gas fireplace insert incl. la- mellas, decor wood and remote control.</p> <p><b>Optional:</b> Cool Down with gravity support, anti-reflective glazing, glass back panel - black</p>	<p><b>GAP-TC-100/38-F-G</b> with <b>AIR EXHAUST SYSTEM:</b> <math>\varnothing</math>130/200 mm</p> 	<p>Dimensions: approx. W 123,2 x H 73-103 x D 38 cm Weight: approx. 106 kg</p> 	GAP-GAS viewing window approx. 100 x 38 cm	GAP-TC-100/38-F-G	
			Cool Down with gravity support	GAP-TC-100/38-F-G-CODO	
			anti-reflective glazing	GAP-TC-100/38-F-G-EV	
			glass back panel	GAP-TC-100/38-F-G-GR	
<p><b>GAP-OT-H-110/55-F-G</b> - Viewing win- dow approx. W 110 x H 55 cm, front - closed, length of the burner: approx. 100 cm, Air-exhaust system (exhaust <math>\varnothing</math>130 mm, combustion air <math>\varnothing</math>200 mm)</p> <p><b>Power:</b> Natural gas: input (consump- tion): 8,9 kW, output (power): 6,8 kW LPG: input (consumption): 7,5 kW, output (power): 5,5 kW</p> <p><b>Including:</b> Gas fireplace insert incl. de- cor wood and remote control.</p> <p><b>Optional:</b> 1 burner line of 2 can be switched off, ventilated double glazing, Cool Down with gravity support, anti- reflective glazing, glass back panel - black, fanassisted air recirculation, Fan-Flex-Flue</p>	<p><b>GAP-OT-H-110/55-F-G</b> with <b>AIR EXHAUST SYSTEM:</b> <math>\varnothing</math>130/200 mm</p> 	<p>Dimensions: approx. W 116,5 x H 85,7 x D 49 cm Weight: approx. 120 kg</p> 	GAP-GAS viewing window approx. 110 x 55 cm	GAP-OT-H-110/55-F-G	
			1 burner line of 2 can be switched off	GAP-OT-H-110/55-F-G-BA	
			ventilated double glazing	GAP-OT-H-110/55-F-G-HD	
			Cool Down with gravity support	GAP-OT-H-110/55-F-G-CODO	
			anti-reflective glazing	GAP-OT-H-110/55-F-G-EV	
			glass back panel	GAP-OT-H-110/55-F-G-GR	
			fan-assisted air recirculation	GAP-OT-H-110/55-F-G-AV	
Fan-Flex-Flue	GAP-OT-H-110/55-F-FFFSET				



## 5. CLOSED GAS FIREPLACE INSERTS - FRONT

### CLOSED GAS FIREPLACE INSERTS - FRONT - Natural gas/LPG

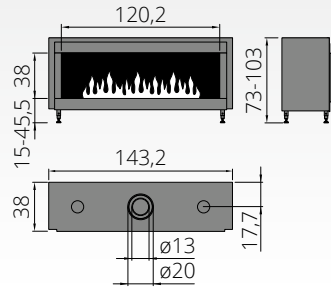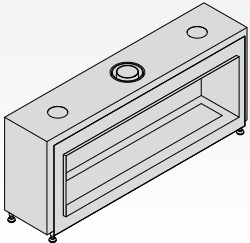
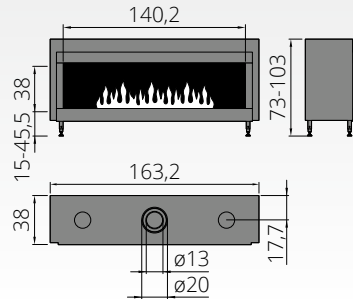
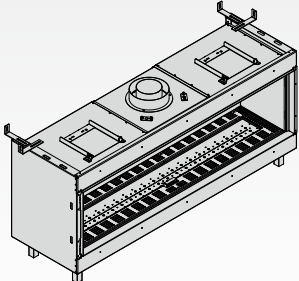
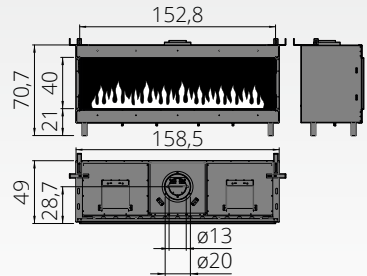


DESCRIPTION	MODEL AIR EXHAUST SYSTEM	DIMENSIONS/WEIGHT	NATURAL GAS/LPG OPTIONAL	PRODUCT- NUMBER	POSSIBLE ACCESSORIES
<p><b>GAP-TC-120/38-F-G</b> - Viewing window approx. W 120 x H 38 cm, front - closed, Air-exhaust system (exhaust ø130 mm, combustion air ø200 mm)</p> <p><b>Power:</b> Natural gas: input (consumption): 13 kW, output (power): 9,4 kW, LPG: input (consumption): 10,5 kW, output (power): 7,4 kW</p> <p><b>Including:</b> Gas fireplace insert incl. lamellas, decor wood and remote control.</p> <p><b>Optional:</b> Cool Down with gravity support, anti-reflective glazing, glass back panel - black</p>	<p><b>GAP-TC-120/38-F-G</b> with <b>AIR EXHAUST SYSTEM:</b> ø130/200 mm</p> 	<p><b>Dimensions: approx.</b> W 143,2 x H 73-103 x D 38 cm <b>Weight: approx. 120 kg</b></p> 	GAP-GAS viewing window approx. 120 x 38 cm	GAP-TC-120/38-F-G	decor stones lava broken (10 kg), decor stones Nero Marquina (10 kg), Superglow, power supply - control unit, smart relaisbox incl. interface, WIFI-control incl. modem and app, wall switch, emergency shutdown for gas appliances, gas socket (natural gas), small bottle regulator for gas bottle (LPG)
			Cool Down with gravity support	GAP-TC-120/38-F-G-CODO	
			anti-reflective glazing	GAP-TC-120/38-F-G-EV	
			glass back panel	GAP-TC-120/38-F-G-GR	
<p><b>GAP-TC-140/38-F-G</b> - Viewing window approx. W 140 x H 38 cm, front - closed, Air-exhaust system (exhaust ø130 mm, combustion air ø200 mm)</p> <p><b>Power:</b> Natural gas: input (consumption): 13 kW, output (power): 9,4 kW, LPG: input (consumption): 10,5 kW, output (power): 7,4 kW</p> <p><b>Including:</b> Gas fireplace insert incl. lamellas, decor wood and remote control.</p> <p><b>Optional:</b> Cool Down with gravity support, anti-reflective glazing, glass back panel - black</p>	<p><b>GAP-TC-140/38-F-G</b> with <b>AIR EXHAUST SYSTEM:</b> ø130/200 mm</p> 	<p><b>Dimensions: approx.</b> W 163,2 x H 73-103 x D 38 cm, <b>Weight: approx. 134 kg</b></p> 	GAP-GAS viewing window approx. 140 x 38 cm	GAP-TC-140/38-F-G	
			Cool Down with gravity support	GAP-TC-140/38-F-G-CODO	
			anti-reflective glazing	GAP-TC-140/38-F-G-EV	
			glass back panel	GAP-TC-140/38-F-G-GR	
<p><b>GAP-OT-150/40-F-G</b> - Viewing window approx. W 150 x H 40 cm, front - closed, length of the burner: approx. 135 cm, Air-exhaust system (exhaust ø130 mm, combustion air ø200 mm)</p> <p><b>Power:</b> Natural gas: input (consumption): 10,5 kW, output (power): 9,5 kW, LPG: input (consumption): 9,5 kW, output (power): 9,5 kW</p> <p><b>Including:</b> Gas fireplace insert incl. decor wood and remote control.</p> <p><b>Optional:</b> 1 burner line of 2 can be switched off, ventilated double glazing, Cool Down with gravity support, anti-reflective glazing, glass back panel - black, fanassisted air recirculation, Fan-Flex-Flue</p>	<p><b>GAP-OT-150/40-F-G</b> with <b>AIR EXHAUST SYSTEM:</b> ø130/200 mm</p> 	<p><b>Dimensions: approx.</b> W 158,5 x H 70,7 x D 49 cm, <b>Weight: approx. 150 kg</b></p> 	GAP-GAS viewing window approx. 150 x 40 cm	GAP-OT-150/40-F-G	
			1 burner line of 2 can be switched off	GAP-OT-150/40-F-G-BA	
			ventilated double glazing	GAP-OT-150/40-F-G-HD	
			Cool Down with gravity support	GAP-OT-150/40-F-G-CODO	
			anti-reflective glazing	GAP-OT-150/40-F-G-EV	
			glass back panel	GAP-OT-150/40-F-G-GR	
			fan-assisted air recirculation	GAP-OT-150/40-F-G-AV	
Fan-Flex-Flue	GAP-OT-150/40-FFFSET				

## 5. CLOSED GAS FIREPLACE INSERTS - FRONT

### CLOSED GAS FIREPLACE INSERTS - FRONT - Natural gas/LPG

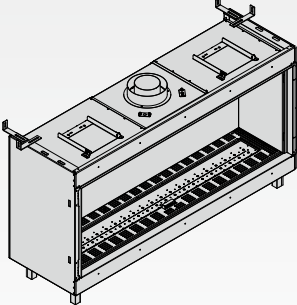
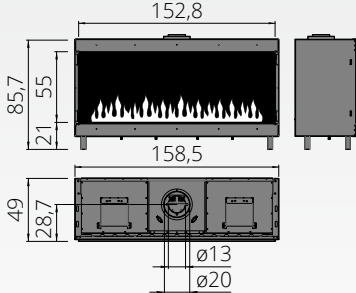
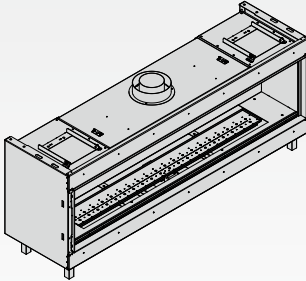
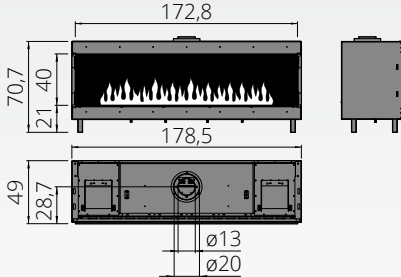


DESCRIPTION	MODEL AIR EXHAUST SYSTEM	DIMENSIONS/WEIGHT	NATURAL GAS/LPG OPTIONAL	PRODUCT- NUMBER	POSSIBLE ACCESSORIES
<p><b>GAP-OT-H-150/55-F-G</b> Viewing window approx. W 150 x H 55 cm, front - closed, length of the burner: approx. 135 cm, Air-exhaust system (exhaust ø130 mm, combustion air ø200 mm)</p> <p><b>Power:</b> Natural gas: input (consumption): 10,5 kW, output (power): 9,5 kW LPG: input (consumption): 11,9 kW, output (power): 7,8 kW</p> <p><b>Including:</b> Gas fireplace insert incl. decor wood and remote control</p> <p><b>Optional:</b> 1 burner line of 2 can be switched off, ventilated double glazing, Cool Down with gravity support, anti-reflective glazing, glass back panel - black, fan- assisted air recirculation, Fan-Flex-Flue</p>	<p><b>GAP-OT-H-150/55-F-G</b> with <b>AIR EXHAUST SYSTEM:</b> ø130/200 mm</p> 	<p>Dimensions: approx. W 158,5 x H 85,7 x D 49 cm Weight: approx. 160 kg</p> 	GAP-GAS viewing window approx. 150 x 55 cm	GAP-OT-H-150/55-F-G	<p>decor stones lava broken (10 kg), decor stones Nero Marquina (10 kg), Superglow, power supply - control unit, smart relaisbox incl. interface, WiFi-control incl. modem and app, wall switch, emergency shutdown for gas appliances, gas socket (natural gas), small bottle regulator for gas bottle (LPG)</p>
			1 burner line of 2 can be switched off	GAP-OT-H-150/55-F-G-BA	
			ventilated double glazing	GAP-OT-H-150/55-F-G-HD	
			Cool Down with gravity support	GAP-OT-H-150/55-F-G-CODO	
			anti-reflective glazing	GAP-OT-H-150/55-F-G-EV	
			glass back panel	GAP-OT-H-150/55-F-G-GR	
			fan-assisted air recirculation	GAP-OT-H-150/55-F-G-AV	
			Fan-Flex-Flue	GAP-OT-H-150/55-F-G-FFFSET	
<p><b>GAP-OT-170/40-F-G</b> Viewing window approx. W 170 x H 40 cm, front - closed, length of the burner: approx. 135 cm, Air-exhaust system (exhaust ø130 mm, combustion air ø200 mm)</p> <p><b>Power:</b> Natural gas: input (consumption): 10,5 kW, output (power): 9,5 kW LPG: input (consumption): 11,9 kW, output (power): 7,8 kW</p> <p><b>Including:</b> Gas fireplace insert incl. decor wood and remote control</p> <p><b>Optional:</b> 1 burner line of 2 can be switched off, ventilated double glazing, Cool Down with gravity support, anti-reflective glazing, glass back panel - black, fan-assisted air recirculation, Fan-Flex-Flue</p>	<p><b>GAP-OT-170/40-F-G</b> with <b>AIR EXHAUST SYSTEM:</b> ø130/200 mm</p> 	<p>Dimensions: approx. W 178,5 x H 70,7 x D 49 cm Weight: approx. 160 kg</p> 	GAP-GAS viewing window approx. 170 x 40 cm	GAP-OT-170/40-F-G	
			1 burner line of 2 can be switched off	GAP-OT-170/40-F-G-BA	
			ventilated double glazing	GAP-OT-170/40-F-G-HD	
			Cool Down with gravity support	GAP-OT-170/40-F-G-CODO	
			anti-reflective glazing	GAP-OT-170/40-F-G-EV	
			glass back panel	GAP-OT-170/40-F-G-GR	
			fan-assisted air recirculation	GAP-OT-170/40-F-G-AV	
			Fan-Flex-Flue	GAP-OT-170/40-F-G-FFFSET	

## 5. CLOSED GAS FIREPLACE INSERTS - FRONT

### CLOSED GAS FIREPLACE INSERTS - FRONT - Natural gas/LPG

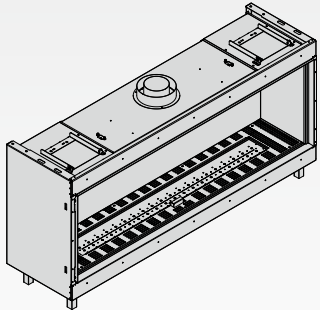
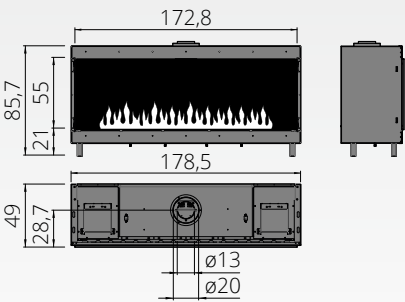
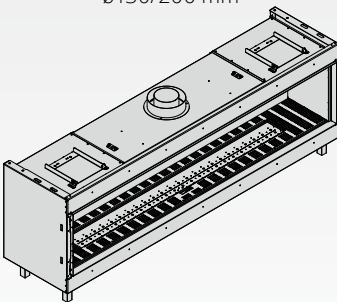
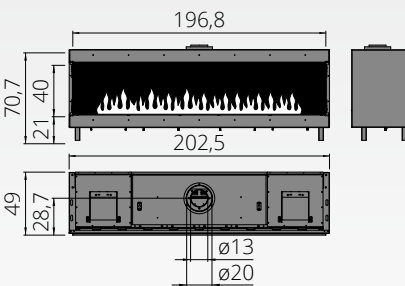


DESCRIPTION	MODEL AIR EXHAUST SYSTEM	DIMENSIONS/WEIGHT	NATURAL GAS/LPG OPTIONAL	PRODUCT- NUMBER	POSSIBLE ACCESSORIES
<p><b>GAP-OT-H-170/55-F-G</b> Viewing window approx. W 170 x H 55 cm, front - closed, length of the burner: approx. 135 cm, Air-exhaust system (exhaust ø130 mm, combustion air ø200 mm)</p> <p><b>Power:</b> Natural gas: input (consumption): 10,5 kW, output (power): 9,1 kW LPG: input (consumption): 11,9 kW, output (power): 7,8 kW</p> <p><b>Including:</b> Gas fireplace insert incl. decor wood and remote control</p> <p><b>Optional:</b> 1 burner line of 2 can be switched off, ventilated double glazing, Cool Down with gravity support, anti-reflective glazing, glass back panel - black, fan-assisted air recirculation, Fan-Flex-Flue</p>	<p><b>GAP-OT-H-170/55-F-G</b> with <b>AIR EXHAUST SYSTEM:</b> ø130/200 mm</p> 	<p>Dimensions: approx. W 178,5 x H 85,7 x D 49 cm Weight: approx. 172 kg</p> 	GAP-GAS viewing window approx. 170 x 55 cm	GAP-OT-H-170/55-F-G	<p>decor stones lava broken (10 kg), decor stones Nero Marquina (10 kg), Superglow, power supply - control unit, smart relaisbox incl. interface, WiFi-control incl. modem and app, wall switch, emergency shutdown for gas appliances, gas socket (natural gas), small bottle regulator for gas bottle (LPG)</p>
			1 burner line of 2 can be switched off	GAP-OT-H-170/55-F-G-BA	
			ventilated double glazing	GAP-OT-H-170/55-F-G-HD	
			Cool Down with gravity support	GAP-OT-H-170/55-F-G-CODO	
			anti-reflective glazing	GAP-OT-H-170/55-F-G-EV	
			glass back panel	GAP-OT-H-170/55-F-G-GR	
			fan-assisted air recirculation	GAP-OT-H-170/55-F-G-AV	
			Fan-Flex-Flue	GAP-OT-H-170/55-F-G-FFFSET	
<p><b>GAP-OT-H-200/40-F-G</b> Viewing window approx. W 200 x H 40 cm, front - closed, length of the burner: approx. 160 cm, Air-exhaust system (exhaust ø130 mm, combustion air ø200 mm)</p> <p><b>Power:</b> Natural gas: input (consumption): 12,9 kW, output (power): 10,6 kW LPG: input (consumption): 12,8 kW, output (power): 9,3 kW</p> <p><b>Including:</b> Gas fireplace insert incl. decor wood and remote control</p> <p><b>Optional:</b> 1 burner line of 2 can be switched off, ventilated double glazing, Cool Down with gravity support, anti-reflective glazing, glass back panel - black, fan-assisted air recirculation, Fan-Flex-Flue</p>	<p><b>GAP-OT-200/40-F-G</b> with <b>AIR EXHAUST SYSTEM:</b> ø130/200 mm</p> 	<p>Dimensions: approx. W 202,5 x H 70,7 x D 49 cm Weight: approx. 200 kg</p> 	GAP-GAS viewing window approx. 200 x 40 cm	GAP-OT-200/40-F-G	
			1 burner line of 2 can be switched off	GAP-OT-200/40-F-G-BA	
			ventilated double glazing	GAP-OT-200/40-F-G-HD	
			Cool Down with gravity support	GAP-OT-200/40-F-G-CODO	
			anti-reflective glazing	GAP-OT-200/40-F-G-EV	
			glass back panel	GAP-OT-200/40-F-G-GR	
			fan-assisted air recirculation	GAP-OT-200/40-F-G-AV	
			Fan-Flex-Flue	GAP-OT-200/40-F-G-FFFSET	

## 5. CLOSED GAS FIREPLACE INSERTS - FRONT

### CLOSED GAS FIREPLACE INSERTS - FRONT - Natural gas/LPG

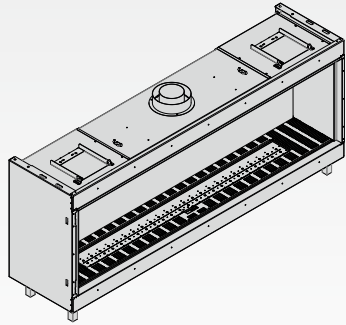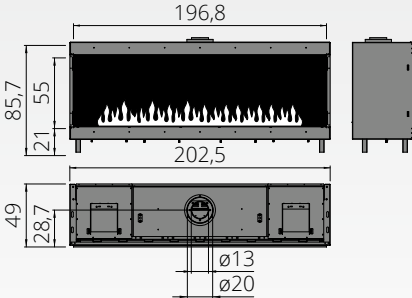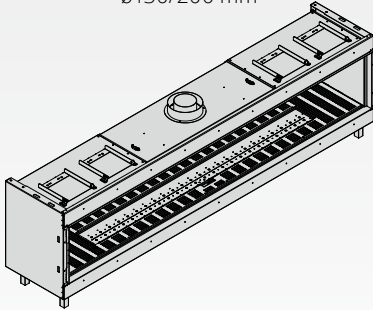
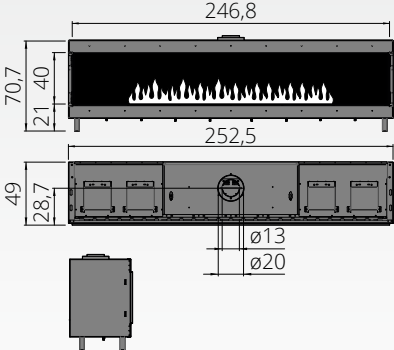


DESCRIPTION	MODEL AIR EXHAUST SYSTEM	DIMENSIONS/WEIGHT	NATURAL GAS/LPG OPTIONAL	PRODUCT- NUMBER	POSSIBLE ACCESSORIES
<p><b>GAP-OT-H-200/55-F-G</b> Viewing window approx. W 200 x H 55 cm, front - closed, length of the burner: approx. 160 cm, Air-exhaust system (exhaust ø130 mm, combustion air ø200 mm)</p> <p><b>Power:</b> Natural gas: input (consumption): 13,0 kW, output (power): 10,8 kW LPG: input (consumption): 10,8 kW, output (power): 9,3 kW</p> <p><b>Including:</b> Gas fireplace insert incl. decor wood and remote control</p> <p><b>Optional:</b> 1 burner line of 2 can be switched off, ventilated double glazing, Cool Down with gravity support, anti-reflective glazing, glass back panel - black, fan-assisted air recirculation, Fan-Flex-Flue</p>	<p><b>GAP-OT-H-200/55-F-G</b> with <b>AIR EXHAUST SYSTEM:</b> ø130/200 mm</p> 	<p>Dimensions: approx. W 202,5 x H 85,7 x D 49 cm Weight: approx. 220 kg</p> 	GAP-GAS viewing window approx. 200 x 55 cm	GAP-OT-H-200/55-F-G	<p>decor stones lava broken (10 kg), decor stones Nero Marquina (10 kg), Superglow, power supply - control unit, smart relaisbox incl. interface, WIFI-control incl. modem and app, wall switch, emergency shutdown for gas appliances, control incl. receiver RW, gas socket (natural gas), small bottle regulator for gas bottle (LPG)</p>
			1 burner line of 2 can be switched off	GAP-OT-H-200/55-F-G-BA	
			ventilated double glazing	GAP-OT-H-200/55-F-G-HD	
			Cool Down with gravity support	GAP-OT-H-200/55-F-G-CODO	
			anti-reflective glazing	GAP-OT-H-200/55-F-G-EV	
			glass back panel	GAP-OT-H-200/55-F-G-GR	
			fan-assisted air recirculation	GAP-OT-H-200/55-F-G-AV	
			Fan-Flex-Flue	GAP-OT-H-200/55-F-G-FFFSET	
<p><b>GAP-OT-H-250/40-F-G</b> Viewing window approx. W 250 x H 40 cm, front - closed, length of the burner: approx. 165 cm, Air-exhaust system (exhaust ø130 mm, combustion air ø200 mm)</p> <p><b>Power:</b> Natural gas: input (consumption): 12,9 kW, output (power): 10,6 kW LPG: input (consumption): 12,8 kW, output (power): 9,3 kW</p> <p><b>Including:</b> Gas fireplace insert incl. decor wood and remote control</p> <p><b>Optional:</b> ventilated double glazing, Cool Down with gravity support, anti-reflective glazing, glass back panel - black, fan-assisted air recirculation, Fan-Flex-Flue</p>	<p><b>GAP-OT-250/40-F-G</b> with <b>AIR EXHAUST SYSTEM:</b> ø130/200 mm</p> 	<p>Dimensions: approx. W 252,5 x H 70,7 x D 49 cm Weight: approx. 200 kg</p> 	GAP-GAS viewing window approx. 250 x 40 cm	GAP-OT-250/40-F-G	
			ventilated double glazing	GAP-OT-250/40-F-G-HD	
			Cool Down with gravity support	GAP-OT-250/40-F-G-CODO	
			glass back panel	GAP-OT-250/40-F-G-GR	
			fan-assisted air recirculation	GAP-OT-250/40-F-G-AV	
			Fan-Flex-Flue	GAP-OT-250/40-F-G-FFFSET	

## 5. CLOSED GAS FIREPLACE INSERTS - FRONT

### CLOSED GAS FIREPLACE INSERTS - FRONT - Natural gas/LPG

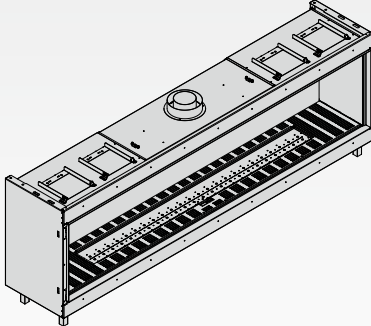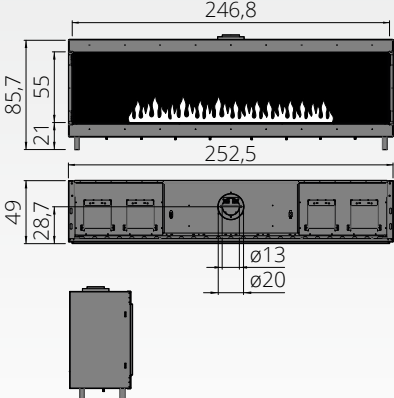

DESCRIPTION	MODEL AIR EXHAUST SYSTEM	DIMENSIONS/WEIGHT	NATURAL GAS/LPG OPTIONAL	PRODUCT- NUMBER	POSSIBLE ACCESSORIES
<p><b>GAP-OT-H-250/55-F-G</b> Viewing window approx. W 250 x H 55 cm, front - closed, length of the burner: approx. 165 cm, Air-exhaust system (exhaust ø130 mm, combustion air ø200 mm)</p> <p><b>Power:</b> Natural gas: input (consumption): 12,9 kW, output (power): 10,6 kW LPG: input (consumption): 12,8 kW, output (power): 9,3 kW</p> <p><b>Including:</b> Gas fireplace insert incl. decor wood and remote control</p> <p><b>Optional:</b> ventilated double glazing, Cool Down with gravity support, anti-reflective glazing, glass back panel - black, fan-assisted air recirculation, Fan-Flex-Flue</p>	<p><b>GAP-OT-H-250/55-F-G</b> with <b>AIR EXHAUST SYSTEM:</b> ø130/200 mm</p> 	<p>Dimensions: approx. W 252,5 x H 85,7 x D 49 cm</p> 	<p><b>GAP-GAS</b> viewing window approx. 250 x 55 cm</p>	GAP-OT-H-250/55-F-G	<p>decor stones lava broken (10 kg), decor stones Nero Marquina (10 kg), Superglow, power supply - control unit, smart relaisbox incl. interface, WIFI-control incl. modem and app, wall switch, emergency shutdown for gas appliances, gas socket (natural gas), small bottle regulator for gas bottle (LPG)</p>
			<p>ventilated double glazing</p>	GAP-OT-H-250/55-F-G-HD	
			<p>Cool Down with gravity support</p>	GAP-OT-H-250/55-F-G-CODO	
			<p>glass back panel</p>	GAP-OT-H-250/55-F-G-GR	
			<p>fan-assisted air recirculation</p>	GAP-OT-H-250/55-F-G-AV	
			<p>Fan-Flex-Flue</p>	GAP-OT-H-250/55-F-G-FFFSET	