

# 1. ETHANOL-FIRE - INSTALLATION DECORATION FIRE PIECES / DECORATION FIRE INSTALLATIONS

## GAP 120




GAP0-120




GAPG-120




GAPT-120



GAPL-120 (Links)  
oder  
GAPR-120 (Rechts)



GAP3K-120



GAP3L-120

### Variations:

#### Closed model with glass doors

- GAPG-120: "GAP - with glass doors" - visible front
- GAPT-120: "GAP - tunnel" - visible front and back
- GAPL-120: "GAP - visible left and front"
- GAPR-120: "GAP - visible right and front"
- GAP3K-120: "GAP - 3 sides visible" (2 short und 1 long side)
- GAP3L-120: "GAP - 3 sides visible" (2 long und 1 short side)

### Description:

#### "GAP - closed"

The closed design with handle-less sliding glass doors for private rooms with air circulation and public use. (hotel, thermal, baths, shops etc.). With closed sliding glass doors, black matt back wall, ventilation openings on the fire chamber floor and adjustable ventilation flap for optimal adjustment of the flame size or flame image. Including connection nozzle (ø160 mm) for exhaust flap and mandatory foul-air duct upwards to the individual foul-air exit from the room to the outside, in a chimney, etc.

A DOUBLE GLAZING WITH REAR VENTILATION to reduce the surface temperature of the glass is available on all models.

A FLANGE EXTENSION (frame support extension) for housing a stronger panel (more than 3 cm, e.g. stone, etc.) is optionally possible up to 6 cm.


SLIDE-UP DOOR with single or double glazing available. Maximum opening up to 30 cm.

### Including:

Decorative fireplace insert as above, 1 band burner (BANB-10), Ignition hook, 5 l Bio-Fuel Indoor, Filling container 2 l, Safety shaft, Thermal insulation, above GAPG-120 also:  
1 Output air flap with cable control, Sliding glass or slide-up glass.

### Dimensions:

Cabinet dimensions: approx. W 128 cm, H 80,4 cm, from D 30,8 (34,4) cm;  
Frame inside dimensions: approx. W 120 cm, H 35 cm, D 4 cm;  
Flange / outer frame dimensions: approx. W 120,8 cm, H 35,8 cm, D 3,6 cm

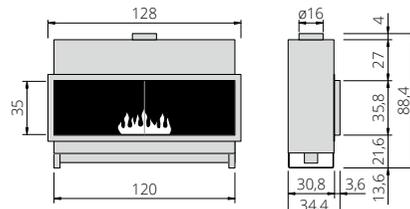

### Weight:

approx. 80 kg

### Optional:

Glass back wall (GAPGR-120), Bronze glass (unilateral Fixglass) instead of clear glass in tunnel design. (GAPGB-120), Flange extension (GAPFV-120), Double glazing, Slide-up door on all front devices and tunnels (one page Fixglass), Locking device with a cylinder lock (SCHE-SG), Thermal exhaust flap (TAK-15), Flexible exhaust pipe (ALRO-01), Hose clamp (KSCH-ES), Output air box with aroma compartment and flap panels (ALKS-KL, ALKS-GR), Front grille (FAGI-AL), Input and output air grille (LUFU-KS, LUFU-GS), Superglow (SUPGL), Don't forget fuel!

### Accessories for home use:

The use of a smaller band burner (BANB-05) is recommended for household applications (average burning time up to max. 4 hours). They facilitate ignition and quickly reach the appropriate flame pattern. Additional reducing sheet is necessary (GAPRB-120).


Product number	GAP 120
GAPG-120	GAP WITH GLASS DOORS 120
GAPT-120	GAP TUNNEL 120
GAPL-120	GAP VISIBLE LEFT AND FRONT 120
GAPR-120	GAP VISIBLE RIGHT AND FRONT 120
GAP3K-120	GAP 3 SIDES VISIBLE 120 (short - long - short)
GAP3L-120	GAP 3 SIDES VISIBLE 120 (long - short - long)
GAPGD-120	GAP CLOSED DOUBLE GLAZING 120
GAPTD-120	GAP TUNNEL DOUBLE GLAZING 120
GAPLD-120	GAP VISIBLE LEFT AND FRONT DOUBLE GLAZING 120
GAPRD-120	GAP VISIBLE RIGHT AND FRONT DOUBLE GLAZING 120
GAP3KD-120	GAP 3 SIDES VISIBLE DOUBLE GLAZING 120 (s-l-s)
GAP3LD-120	GAP 3 SIDES VISIBLE DOUBLE GLAZING 120 (l-s-l)
Product number	Accessories GAP 120
GAPGR-120	GAP BACK GLASS WALL 120
GAPGB-120	BRONZE GLASS (UNILATERAL FIXGLASS) on GAPT-120
GAPHT1-120	RAISABLE DOOR (SURCHARGE on GAPG-120 / GAPT-120)
GAPHT2-120	RAISABLE DOOR DOUBLE GLAZING (SURCHARGE on GAPG-120 / GAPT-120)
GAPFV-120	GAP FLANGE EXTENSION (UP TO 6 cm) 120
GAPRB-120	REDUKTION SHEET FOR GAP 120 (115 x 15 cm)
TAK-15	THERMAL EXHAUST FLAP ø15 cm
ALRO-01	FLEXIBLE EXHAUST PIPE (ø16 cm, 1 m)
KSCH-ES	HOSE CLAMP (STAINLESS STEEL)
ALKS-KL	OUTPUT AIR BOX SMALL (13 x 33 x 25 cm)
ALKS-GR	OUTPUT AIR BOX LARGE (21 x 33 x 25 cm)
FAGI-AL	FRONT GRILLE (COVER ALUMINIUM)
LUFU-KW	INPUT AND OUTPUT AIR GRILLE SMALL (WHITE)
LUFU-GW	INPUT AND OUTPUT AIR GRILLE LARGE (WHITE)
SCHE-SG	LOCKING DEVICE (SLIDING GLASS PANES)
SUPGL	SUPERGLOW (1 gram GLOW-WOOL)

# 1. ETHANOL-FIRE - INSTALLATION DECORATION FIRE PIECES / DECORATION FIRE INSTALLATIONS

## GAP 150




GAPO-150




GAPG-150




GAPT-150



GAPL-150 (Links)  
oder  
GAPR-150 (Rechts)



GAP3K-150



GAP3L-150

### Variations:

#### Closed model with glass doors

- GAPG-150: "GAP - with glass doors" - visible front
- GAPT-150: "GAP - tunnel" - visible front and back
- GAPL-150: "GAP - visible left and front"
- GAPR-150: "GAP - visible right and front"
- GAP3K-150: "GAP - 3 sides visible" (2 short und 1 long side)
- GAP3L-150: "GAP - 3 sides visible" (2 long und 1 short side)

### Description:

#### "GAP - closed"

The closed design with handle-less sliding glass doors for private rooms with air circulation and public use. (hotel, thermal, baths, shops etc.). With closed sliding glass doors, black matt back wall, ventilation openings on the fire chamber floor and adjustable ventilation flap for optimal adjustment of the flame size or flame image. Including connection nozzle (ø160 mm) for exhaust flap and mandatory foul-air duct upwards to the individual foul-air exit from the room to the outside, in a chimney, etc.

A DOUBLE GLAZING WITH REAR VENTILATION to reduce the surface temperature of the glass is available on all models.

A FLANGE EXTENSION (frame support extension) for housing a stronger panel (more than 3 cm, e.g. stone, etc.) is optionally possible up to 6 cm.


SLIDE-UP DOOR with single or double glazing available. Maximum opening up to 30 cm.

### Including:

Decorative fireplace insert as above, 2 band burner (BANB-10), Ignition hook, 10 l Bio-Fuel Indoor, Filling container 2 l, Safety shaft, Thermal insulation, above GAPG-150 also:  
1 Output air flap with cable control, Sliding glass or slide-up glass.

### Dimensions:

Cabinet dimensions: approx. W 158 cm, H 85,4 cm, from D 30,8 (34,4) cm;  
Frame inside dimensions: approx. W 150 cm, H 40 cm, D 4 cm;  
Flange / outer frame dimensions: approx. W 150,8 cm, H 40,8 cm, D 3,6 cm

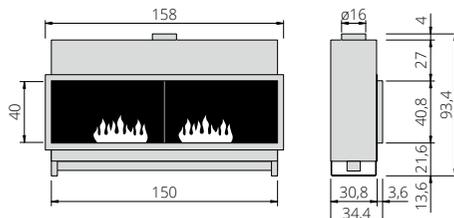

### Weight:

approx. 100 kg

### Optional:

Glass back wall (GAPGR-150), Bronze glass (unilateral Fixglass) instead of clear glass in tunnel design. (GAPGB-150), Flange extension (GAPFV-150), Double glazing, Slide-up door on all front devices and tunnels (one page Fixglass), Locking device with a cylinder lock (SCHE-SG), Thermal exhaust flap (TAK-15), Flexible exhaust pipe (ALRO-01), Hose clamp (KSCH-ES), Output air box with aroma compartment and flap panels (ALKS-KL, ALKS-GR), Front grille (FAGI-AL), Input and output air grille (LUFK-KS, LUFK-GS), Superglow (SUPGL), Don't forget fuel!


### Accessories for home use:

The use of a smaller band burner (BANB-05) is recommended for household applications (average burning time up to max. 4 hours). They facilitate ignition and quickly reach the appropriate flame pattern. Additional reducing sheet is necessary (GAPRB-150).


Product number	GAP 150
GAPG-150	GAP WITH GLASS DOORS 150
GAPT-150	GAP TUNNEL 150
GAPL-150	GAP VISIBLE LEFT AND FRONT 150
GAPR-150	GAP VISIBLE RIGHT AND FRONT 150
GAP3K-150	GAP 3 SIDES VISIBLE 150 (short - long - short)
GAP3L-150	GAP 3 SIDES VISIBLE 150 (long - short - long)
GAPGD-150	GAP CLOSED DOUBLE GLAZING 150
GAPTD-150	GAP TUNNEL DOUBLE GLAZING 150
GAPLD-150	GAP VISIBLE LEFT AND FRONT DOUBLE GLAZING 150
GAPRD-150	GAP VISIBLE RIGHT AND FRONT DOUBLE GLAZING 150
GAP3KD-150	GAP 3 SIDES VISIBLE DOUBLE GLAZING 150 (s-l-s)
GAP3LD-150	GAP 3 SIDES VISIBLE DOUBLE GLAZING 150 (l-s-l)
Product number	Accessories GAP 150
GAPGR-150	GAP BACK GLASS WALL 150
GAPGB-150	BRONZE GLASS (UNILATERAL FIXGLASS) on GAPT-150
GAPHT1-150	RAISABLE DOOR (SURCHARGE on GAPG-150 / GAPT-150)
GAPHT2-150	RAISABLE DOOR DOUBLE GLAZING (SURCHARGE on GAPG-150 / GAPT-150)
GAPFV-150	GAP FLANGE EXTENSION (UP TO 6 cm) 150
GAPRB-150	REDUKTION SHEET FOR GAP 150 (145 x 15 cm)
TAK-15	THERMAL EXHAUST FLAP ø15 cm
ALRO-01	FLEXIBLE EXHAUST PIPE (ø16 cm, 1 m)
KSCH-ES	HOSE CLAMP (STAINLESS STEEL)
ALKS-KL	OUTPUT AIR BOX SMALL (13 x 33 x 25 cm)
ALKS-GR	OUTPUT AIR BOX LARGE (21 x 33 x 25 cm)
FAGI-AL	FRONT GRILLE (COVER ALUMINIUM)
LUFK-KW	INPUT AND OUTPUT AIR GRILLE SMALL (WHITE)
LUFK-GW	INPUT AND OUTPUT AIR GRILLE LARGE (WHITE)
SCHE-SG	LOCKING DEVICE (SLIDING GLASS PANES)
SUPGL	SUPERGLOW (1 gram GLOW-WOOL)

# 1. ETHANOL-FIRE - INSTALLATION DECORATION FIRE PIECES / DECORATION FIRE INSTALLATIONS


## GAP 200




GAP-200




GAPG-200



GAPT-200



GAPL-200 (left)  
or  
GAPR-200 (right)



GAP3K-200

### Variations:

#### Closed model with glass doors

- GAPG-200: "GAP - with glass doors" - visible front
- GAPT-200: "GAP - tunnel" - visible front and back
- GAPL-200: "GAP - visible left and front"
- GAPR-200: "GAP - visible right and front"
- GAP3K-200: "GAP - 3 sides visible" (2 short und 1 long side)

### Description:

#### "GAP - closed"

The closed design with handle-less sliding glass doors for private rooms with air circulation and public use. (hotel, thermal, baths, shops etc.). With closed sliding glass doors, black matt back wall, ventilation openings on the fire chamber floor and adjustable ventilation flap for optimal adjustment of the flame size or flame image. Including connection nozzle (ø160 mm) for exhaust flap and mandatory foul-air duct upwards to the individual foul-air exit from the room to the outside, in a chimney, etc.

A DOUBLE GLAZING WITH REAR VENTILATION to reduce the surface temperature of the glass is available on all models.

A FLANGE EXTENSION (frame support extension) for housing a stronger panel (more than 3 cm, e.g. stone, etc.) is optionally possible up to 6 cm.

SLIDE-UP DOOR with single or double glazing available. Maximum opening up to 30 cm.

### Including:


Decorative fireplace insert as above, 3 band burner (BANB-10), Ignition hook, 10 l Bio-Fuel Indoor, Filling container 2 l, Safety shaft, Thermal insulation, above GAPG-200 also:  
2 Output air flap with cable control, Sliding glass or slide-up glass.

### Dimensions:

Cabinet dimensions: approx. W 208 cm, H 85,4 cm, from D 30,8 (34,4) cm;

Frame inside dimensions: approx. W 200 cm, H 40 cm, D 4 cm

Flange / outer frame dimensions: approx. W 200,8 cm, H 40,8 cm, D 3,6 cm

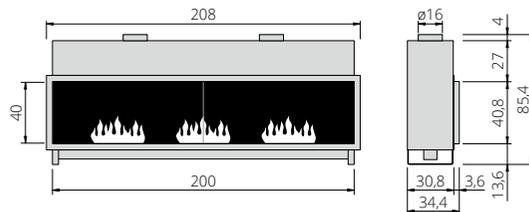

### Weight:

approx. 130 kg

### Optional:

Glass back wall (GAPGR-200), Bronze glass (unilateral Fixglass) instead of clear glass in tunnel design. (GAPGB-200), Flange extension (GAPFV-200), Double glazing, Slide-up door on all front devices and tunnels (one page Fixglass), Locking device with a cylinder lock (SCHE-SG), Thermal exhaust flap (TAK-15), Flexible exhaust pipe (ALRO-01), Hose clamp (KSCH-ES), Output air box with aroma compartment and flap panels (ALKS-KL, ALKS-GR), Front grille (FAGI-AL), Input and output air grille (LUFK-KS, LUFK-GS), Superglow (SUPGL), Don't forget fuel!

### Accessories for home use:


The use of a smaller band burner (BANB-05) is recommended for household applications (average burning time up to max. 4 hours). They facilitate ignition and quickly reach the appropriate flame pattern. Additional reducing sheet is necessary (GAPRB-200).

Product number	GAP 200
GAPG-200	GAP WITH GLASS DOORS 200
GAPT-200	GAP TUNNEL 200
GAPL-200	GAP VISIBLE LEFT AND FRONT 200
GAPR-200	GAP VISIBLE RIGHT AND FRONT 200
GAP3K-200	GAP 3 SIDES VISIBLE 200 (short - long - short)
GAPGD-200	GAP CLOSED DOUBLE GLAZING 200
GAPTD-200	GAP TUNNEL DOUBLE GLAZING 200
GAPLD-200	GAP VISIBLE LEFT AND FRONT DOUBLE GLAZING 200
GAPRD-200	GAP VISIBLE RIGHT AND FRONT DOUBLE GLAZING 200
GAP3KD-200	GAP 3 SIDES VISIBLE DOUBLE GLAZING 200 (s-l-s)


Product number	Accessories GAP 200
GAPGR-200	GAP BACK GLASS WALL 200
GAPGB-200	BRONZE GLASS (UNILATERAL FIXGLASS) on GAPT-200
GAPHT1-200	RAISABLE DOOR (SURCHARGE on GAPG-200 / GAPT-200)
GAPHT2-200	RAISABLE DOOR DOUBLE GLAZING (SURCHARGE on GAPG-200 / GAPT-200)
GAPFV-200	GAP FLANGE EXTENSION (UP TO 6 cm) 200
GAPRB-200	REDUKTION SHEET FOR GAP 200 (195 x 15 cm)
TAK-15	THERMAL EXHAUST FLAP ø15 cm
ALRO-01	FLEXIBLE EXHAUST PIPE (ø16 cm, 1 m)
KSCH-ES	HOSE CLAMP (STAINLESS STEEL)
ALKS-KL	OUTPUT AIR BOX SMALL (13 x 33 x 25 cm)
ALKS-GR	OUTPUT AIR BOX LARGE (21 x 33 x 25 cm)
FAGI-AL	FRONT GRILLE (COVER ALUMINIUM)
LUFK-KW	INPUT AND OUTPUT AIR GRILLE SMALL (WHITE)
LUFK-GW	INPUT AND OUTPUT AIR GRILLE LARGE (WHITE)
SCHE-SG	LOCKING DEVICE (SLIDING GLASS PANES)
SUPGL	SUPERGLOW (1 gram GLOW-WOOL)

# 1. ETHANOL-FIRE - INSTALLATION DECORATION FIRE PIECES / DECORATION FIRE INSTALLATIONS

## GAP 250




GAPO-250



GAPG-250



GAPT-250



GAPL-250 (left)  
or  
GAPR-250 (right)



GAP3K-250

### Variations:

#### Closed model with glass doors

- GAPG-250: "GAP - with glass doors" - visible front
- GAPT-250: "GAP - tunnel" - visible front and back
- GAPL-250: "GAP - visible left and front"
- GAPR-250: "GAP - visible right and front"
- GAP3K-250: "GAP - 3 sides visible" (2 short und 1 long side)

### Description:

#### "GAP - closed"

The closed design with handle-less sliding glass doors for private rooms with air circulation and public use. (hotel, thermal, baths, shops etc.). With closed sliding glass doors, black matt back wall, ventilation openings on the fire chamber floor and adjustable ventilation flap for optimal adjustment of the flame size or flame image. Including connection nozzle (ø160 mm) for exhaust flap and mandatory foul-air duct upwards to the individual foul-air exit from the room to the outside, in a chimney, etc.

A DOUBLE GLAZING WITH REAR VENTILATION to reduce the surface temperature of the glass is available on all models.


A FLANGE EXTENSION (frame support extension) for housing a stronger panel (more than 3 cm, e.g. stone, etc.) is optionally possible up to 6 cm.

### Including:

Decorative fireplace insert as above, 4 band burner (BANB-10), Ignition hook, 10 l Bio-Fuel Indoor, Filling container 2 l, Safety shaft, Thermal insulation, above GAPG-250 also: 3 Output air flap with cable control, Sliding glass.

### Dimensions:

Cabinet dimensions: approx. W 258 cm, H 85,4 cm, from D 30,8 (34,4) cm;  
Frame inside dimensions: approx. W 250 cm, H 40 cm, D 4 cm  
Flange / outer frame dimensions: approx. W 250,8 cm, H 40,8 cm, D 3,6 cm

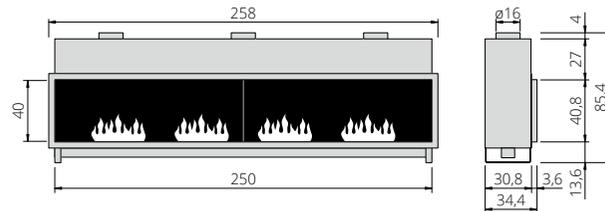

### Weight:

approx. 160 kg

### Optional:

Glass back wall (GAPGR-250), Bronze glass (unilateral Fixglass) instead of clear glass in tunnel design. (GAPGB-250), Flange extension (GAPFV-250), Double glazing, Locking device with a cylinder lock (SCHE-SG), Thermal exhaust flap (TAK-15), Flexible exhaust pipe (ALRO-01), Hose clamp (KSCH-ES), Output air box with aroma compartment and flap panels (ALKS-KL, ALKS-GR), Front grille (FAGI-AL), Input and output air grille (LUFK-KS, LUFK-GS), Superglow (SUPGL), Don't forget fuel!

### Accessories for home use:


The use of a smaller band burner (BANB-05) is recommended for household applications (average burning time up to max. 4 hours). They facilitate ignition and quickly reach the appropriate flame pattern. Additional reducing sheet is necessary (GAPRB-250).

Product number	GAP 250
GAPG-250	GAP WITH GLASS DOORS 250
GAPT-250	GAP TUNNEL 250
GAPL-250	GAP VISIBLE LEFT AND FRONT 250
GAPR-250	GAP VISIBLE RIGHT AND FRONT 250
GAP3K-250	GAP 3 SIDES VISIBLE 250 (short - long - short)
GAPGD-250	GAP CLOSED DOUBLE GLAZING 250
GAPTD-250	GAP TUNNEL DOUBLE GLAZING 250
GAPLD-250	GAP VISIBLE LEFT AND FRONT DOUBLE GLAZING 250
GAPRD-250	GAP VISIBLE RIGHT AND FRONT DOUBLE GLAZING 250
GAP3KD-250	GAP 3 SIDES VISIBLE DOUBLE GLAZING 250 (s-l-s)


Product number	Accessories GAP 250
GAPGR-250	GAP BACK GLASS WALL 250
GAPGB-250	BRONZE GLASS (UNILATERAL FIXGLASS) on GAPT-250
GAPFV-250	GAP FLANGE EXTENSION (UP TO 6 cm) 250
GAPRB-250	REDUKTION SHEET FOR GAP 250 (245 x 15 cm)
TAK-15	THERMAL EXHAUST FLAP ø15 cm
ALRO-01	FLEXIBLE EXHAUST PIPE (ø16 cm, 1 m)
KSCH-ES	HOSE CLAMP (STAINLESS STEEL)
ALKS-KL	OUTPUT AIR BOX SMALL (13 x 33 x 25 cm)
ALKS-GR	OUTPUT AIR BOX LARGE (21 x 33 x 25 cm)
FAGI-AL	FRONT GRILLE (COVER ALUMINIUM)
LUFK-KW	INPUT AND OUTPUT AIR GRILLE SMALL (WHITE)
LUFK-GW	INPUT AND OUTPUT AIR GRILLE LARGE (WHITE)
SCHE-SG	LOCKING DEVICE (SLIDING GLASS PANES)
SUPGL	SUPERGLOW (1 gram GLOW-WOOL)

# 1. ETHANOL-FIRE - INSTALLATION DECORATION FIRE PIECES / DECORATION FIRE INSTALLATIONS

## GAP 300




GAPO-300




GAPG-300



GAPT-300



GAPL-300 (left)  
or  
GAPR-300 (right)



GAP3K-300

### Variations:

#### Closed model with glass doors

- GAPG-300: "GAP - with glass doors" - visible front
- GAPT-300: "GAP - tunnel" - visible front and back
- GAPL-300: "GAP - visible left and front"
- GAPR-300: "GAP - visible right and front"
- GAP3K-300: "GAP - 3 sides visible" (2 short und 1 long side)

### Description:

#### "GAP - closed"

The closed design with handle-less sliding glass doors for private rooms with air circulation and public use. (hotel, thermal, baths, shops etc.). With closed sliding glass doors, black matt back wall, ventilation openings on the fire chamber floor and adjustable ventilation flap for optimal adjustment of the flame size or flame image. Including connection nozzle (ø160 mm) for exhaust flap and mandatory foul-air duct upwards to the individual foul-air exit from the room to the outside, in a chimney, etc.

A DOUBLE GLAZING WITH REAR VENTILATION to reduce the surface temperature of the glass is available on all models.


A FLANGE EXTENSION (frame support extension) for housing a stronger panel (more than 3 cm, e.g. stone, etc.) is optionally possible up to 6 cm.

### Including:

Decorative fireplace insert as above, 4 band burner (BANB-10), Ignition hook, 10 l Bio-Fuel Indoor, Filling container 2 l, Safety shaft, Thermal insulation, above GAPG-300 also: 3 Output air flap with cable control, Sliding glass.

### Dimensions:

Cabinet dimensions: approx. W 308 cm, H 85,4 cm, from D 30,8 (34,4) cm;  
Frame inside dimensions: approx. W 300 cm, H 40 cm, D 4 cm  
Flange / outer frame dimensions: approx. W 300,8 cm, H 40,8 cm, D 3,6 cm

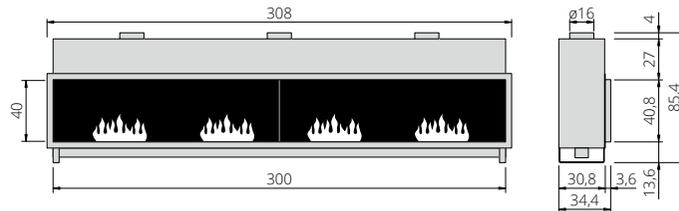

### Weight:

approx. 190 kg

### Optional:

Glass back wall (GAPGR-300), Bronze glass (unilateral Fixglass) instead of clear glass in tunnel design. (GAPGB-300), Flange extension (GAPFV-300), Double glazing, Locking device with a cylinder lock (SCHE-SG), Thermal exhaust flap (TAK-15), Flexible exhaust pipe (ALRO-01), Hose clamp (KSCH-ES), Output air box with aroma compartment and flap panels (ALKS-KL, ALKS-GR), Front grille (FAGI-AL), Input and output air grille (LUFG-KS, LUFG-GS), Superglow (SUPGL), Don't forget fuel!

### Accessories for home use:

The use of a smaller band burner (BANB-05) is recommended for household applications (average burning time up to max. 4 hours). They facilitate ignition and quickly reach the appropriate flame pattern. Additional reducing sheet is necessary (GAPRB-300).

Product number	GAP 300
GAPG-300	GAP WITH GLASS DOORS 300
GAPT-300	GAP TUNNEL 300
GAPL-300	GAP VISIBLE LEFT AND FRONT 300
GAPR-300	GAP VISIBLE RIGHT AND FRONT 300
GAP3K-300	GAP 3 SIDES VISIBLE 300 (short - long - short)
GAPGD-300	GAP CLOSED DOUBLE GLAZING 300
GAPTD-300	GAP TUNNEL DOUBLE GLAZING 300
GAPLD-300	GAP VISIBLE LEFT AND FRONT DOUBLE GLAZING 300
GAPRD-300	GAP VISIBLE RIGHT AND FRONT DOUBLE GLAZING 300
GAP3KD-300	GAP 3 SIDES VISIBLE DOUBLE GLAZING 300 (s-l-s)

Product number	Accessories GAP 300
GAPGR-300	GAP BACK GLASS WALL 300
GAPGB-300	BRONZE GLASS (UNILATERAL FIXGLASS) on GAPT-300
GAPFV-300	GAP FLANGE EXTENSION (UP TO 6 cm) 300
GAPRB-300	REDUKTION SHEET FOR GAP 300 (295 x 15 cm)
TAK-15	THERMAL EXHAUST FLAP ø15 cm
ALRO-01	FLEXIBLE EXHAUST PIPE (ø16 cm, 1 m)
KSCH-ES	HOSE CLAMP (STAINLESS STEEL)
ALKS-KL	OUTPUT AIR BOX SMALL (13 x 33 x 25 cm)
ALKS-GR	OUTPUT AIR BOX LARGE (21 x 33 x 25 cm)
FAGI-AL	FRONT GRILLE (COVER ALUMINIUM)
LUFG-KW	INPUT AND OUTPUT AIR GRILLE SMALL (WHITE)
LUFG-GW	INPUT AND OUTPUT AIR GRILLE LARGE (WHITE)
SCHE-SG	LOCKING DEVICE (SLIDING GLASS PANES)
SUPGL	SUPERGLOW (1 gram GLOW-WOOL)

# 1. ETHANOL-FIRE - INSTALLATION DECORATION FIRE PIECES / DECORATION FIRE INSTALLATIONS

## GAP 400

### Variations:

#### Closed model with glass doors

- GAPG-400: "GAP - with glass doors" - visible front
- GAPT-400: "GAP - tunnel" - visible front and back
- GAPL-400: "GAP - visible left and front"
- GAPR-400: "GAP - visible right and front"
- GAP3K-400: "GAP - 3 sides visible" (2 short und 1 long side)

### Description:

#### "GAP - closed"

The closed design with handle-less sliding glass doors for private rooms with air circulation and public use. (hotel, thermal, baths, shops etc.). With closed sliding glass doors, black matt back wall, ventilation openings on the fire chamber floor and adjustable ventilation flap for optimal adjustment of the flame size or flame image. Including connection nozzle (ø160 mm) for exhaust flap and mandatory foul-air duct upwards to the individual foul-air exit from the room to the outside, in a chimney, etc.

A DOUBLE GLAZING WITH REAR VENTILATION to reduce the surface temperature of the glass is available on all models.



A FLANGE EXTENSION (frame support extension) for housing a stronger panel (more than 3 cm, e.g. stone, etc.) is optionally possible up to 6 cm.

### Including:


Decorative fireplace insert as above, 5 band burner (BANB-10), Ignition hook, 10 l Bio-Fuel Indoor, Filling container 2 l, Safety shaft, Thermal insulation, above GAPG-400 also: 3 Output air flap with cable control, Sliding glass.

### Dimensions:


Cabinet dimensions: approx. W 408 cm, H 85,4 cm, from D 30,8 (34,4) cm;  
 Frame inside dimensions: approx. W 400 cm, H 40 cm, D 4 cm  
 Flange / outer frame dimensions: approx. W 400,8 cm, H 40,8 cm, D 3,6 cm

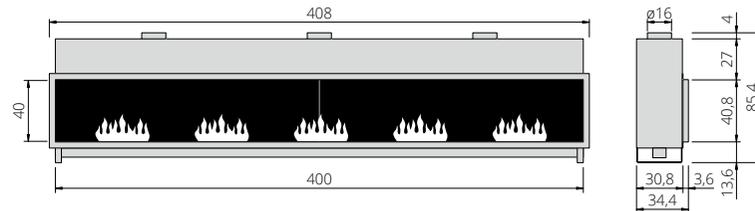


GAPG-400



GAPT-400



GAPL-400 (left)  
or  
GAPR-400 (right)



GAP3K-400

### Weight:

approx. 240 kg

### Optional:

Glass back wall (GAPGR-400), Bronze glass (unilateral Fixglass) instead of clear glass in tunnel design. (GAPGB-400), Flange extension (GAPFV-400), Double glazing, Locking device with a cylinder lock (SCHE-SG), Thermal exhaust flap (TAK-15), Flexible exhaust pipe (ALRO-01), Hose clamp (KSCH-ES), Output air box with aroma compartment and flap panels (ALKS-KL, ALKS-GR), Front grille (FAGI-AL), Input and output air grille (LUFK-KS, LUFK-GS), Superglow (SUPGL), Don't forget fuel!

### Accessories for home use:

The use of a smaller band burner (BANB-05) is recommended for household applications (average burning time up to max. 4 hours). They facilitate ignition and quickly reach the appropriate flame pattern. Additional reducing sheet is necessary (GAPRB-400).

Product number	GAP 400
GAPG-400	GAP WITH GLASS DOORS 400
GAPT-400	GAP TUNNEL 400
GAPL-400	GAP VISIBLE LEFT AND FRONT 400
GAPR-400	GAP VISIBLE RIGHT AND FRONT 400
GAP3K-400	GAP 3 SIDES VISIBLE 400 (short - long - short)
GAPGD-400	GAP CLOSED DOUBLE GLAZING 400
GAPTD-400	GAP TUNNEL DOUBLE GLAZING 400
GAPLD-400	GAP VISIBLE LEFT AND FRONT DOUBLE GLAZING 400
GAPRD-400	GAP VISIBLE RIGHT AND FRONT DOUBLE GLAZING 400
GAP3KD-400	GAP 3 SIDES VISIBLE DOUBLE GLAZING 400 (s-l-s)

Product number	Accessories GAP 400
GAPGR-400	GAP BACK GLASS WALL 400
GAPGB-400	BRONZE GLASS (UNILATERAL FIXGLASS) on GAPT-400
GAPFV-400	GAP FLANGE EXTENSION (UP TO 6 cm) 400
GAPRB-400	REDUKTION SHEET FOR GAP 400 (395 x 15 cm)
TAK-15	THERMAL EXHAUST FLAP ø15 cm
ALRO-01	FLEXIBLE EXHAUST PIPE (ø16 cm, 1 m)
KSCH-ES	HOSE CLAMP (STAINLESS STEEL)
ALKS-KL	OUTPUT AIR BOX SMALL (13 x 33 x 25 cm)
ALKS-GR	OUTPUT AIR BOX LARGE (21 x 33 x 25 cm)
FAGI-AL	FRONT GRILLE (COVER ALUMINIUM)
LUFK-KW	INPUT AND OUTPUT AIR GRILLE SMALL (WHITE)
LUFK-GW	INPUT AND OUTPUT AIR GRILLE LARGE (WHITE)
SCHE-SG	LOCKING DEVICE (SLIDING GLASS PANES)
SUPGL	SUPERGLOW (1 gram GLOW-WOOL)